


SECTION 14
 TOWNSHIP 4N RANGE 28E
 W.M., UMATILLA COUNTY, OR
 SCALE: 1" = 500'

S.E. COR
 SEC. 14
 FD BRASS CAP
 MARKED:
 TAN RZBE
 141B
 23124
 RLS 933


REGISTERED
 PROFESSIONAL
 LAND SURVEYOR
 William R. Wells
 OREGON
 JULY 22, 1977
 WILLIAM R. WELLS
 1106

LEGEND
 O - MONUMENTS FOUND AS NOTED
 ● - SET 5/8" IRON PINS

BASIS OF BEARINGS: USC & GS STATION HERMISTON BUTTE TO HERM. AIR, BEARINGS SHOWN ARE GEODETIC (TRUE).

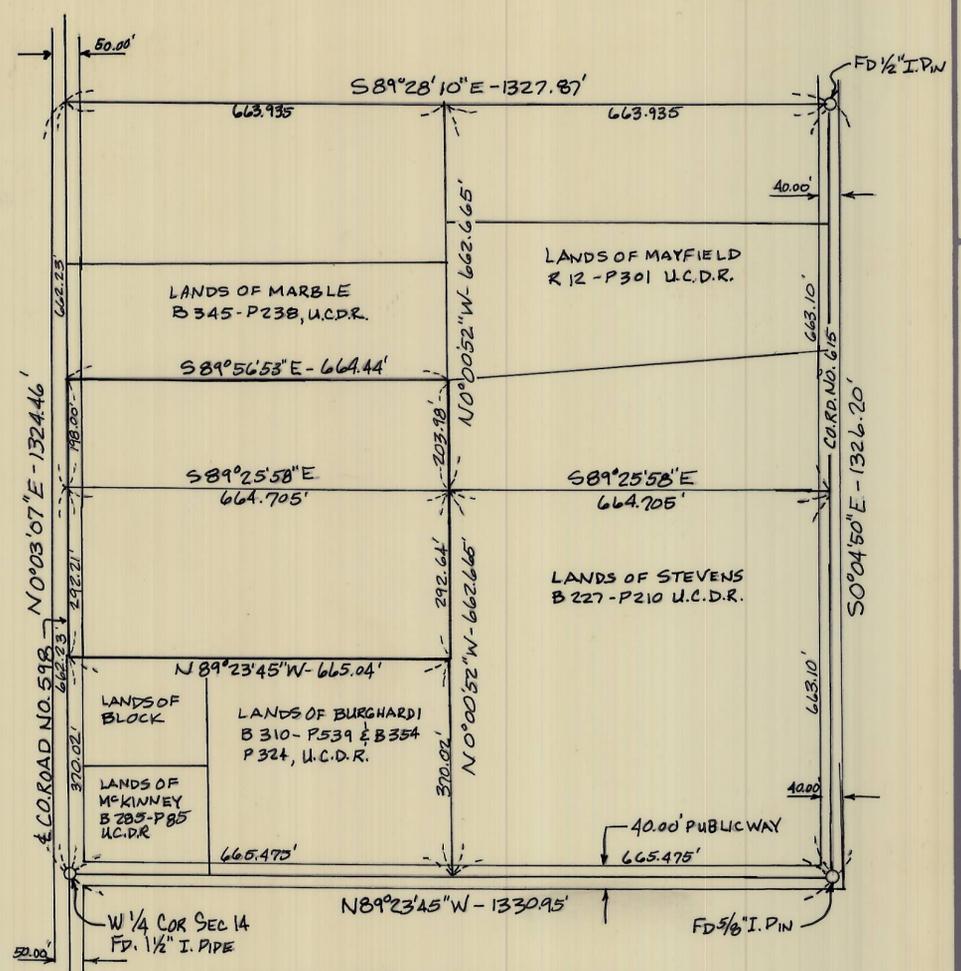

DETAIL OF SW 1/4 NW 1/4 OF SECTION 14
 SCALE: 1" = 200'

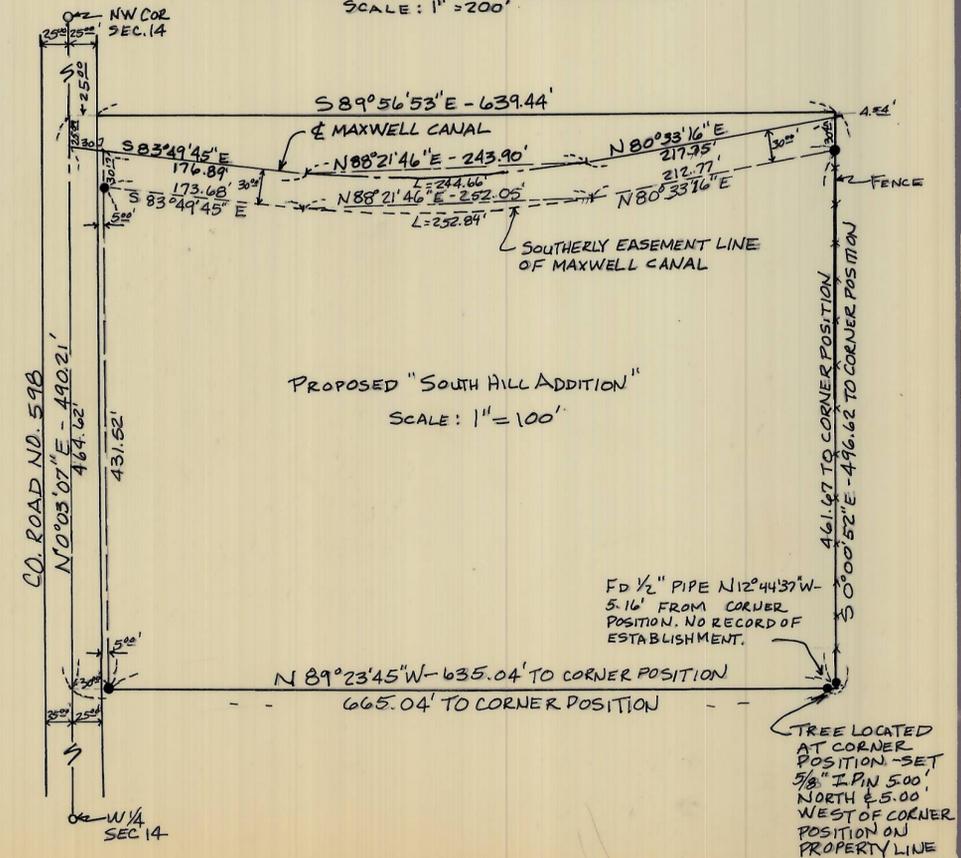

PROPOSED "SOUTH HILL ADDITION"
 SCALE: 1" = 100'

RECEIVED BY
 Umatilla County Surveyor
 Date: 4-25-79
 Rec'd By: M.J.W.
 No. A-924-B

BRUNING 40-22-37139

WALLULIS PROJECT NO: 78-127	AGENCY PROJECT NO:
PROJECT: BOUNDARY SURVEY FOR THE PROPOSED SOUTH HILL ADDITION TO HERMISTON, OREGON	
WALLULIS & ASSOCIATES, INC. ENGINEERING & PLANNING 108 EAST MAIN HERMISTON, OREGON 97838 503 - 567 - 3331	
SCALE: AS SHOWN	DATE: 2-24-79
DES BY: WJW	DR BY: WJW
CK BY:	
TITLE: SURVEY	
REVISIONS	
DRAWING: Q-924-B	
SHEET 1 OF 1	

NARRATIVE OF SURVEY

in the

SW 1/4 of the NW 1/4 of Section 14, Twp. 4N, Rge 28 EWM, Umatilla County, Oregon

I. Purpose - The purpose of this survey was to locate the boundaries for the proposed "South Hill Addition" Subdivision to Hermiston.

II. Method - The project was begun by researching the County Surveyor's records to determine what corner monuments were available within the section and in particular those monuments available which mark the Northwest Quarter of Section 14. There is no record of any of the original government corners on Section 14 being perpetuated by the monuments which we found, with the exception of the East 1/4 Corner of Section 14.

The survey began by locating monuments of record which are apparently the best available evidence of the position of the original government corners. The monuments found for the corners on the exterior of the section and the center of the section were used to check the position of the monuments found for the corners of the SW 1/4 of the NW 1/4 of Section 14.

The monuments found at the S.W., S.E., and N.E. corners of SW 1/4 of the NW 1/4 and the computed position for the NW Corner of the SW 1/4 of the NW 1/4 were used to break down the SW 1/4 of the NW 1/4 as directed in the 1973 Manual of Instructions.

III. Conclusion and Action

The overall boundaries of the proposed subdivision were based on the monuments found at the S.W., S.E. and N.E. corners of the SW 1/4 of the NW 1/4 and the computed position of the N.W. Corner of the SW 1/4 of the NW 1/4 of Section 14 and were located as follows and as shown on the Map of Survey:

South Boundary - Located perpendicular to and 370.00 feet Due North of the South line of the SW 1/4 of the NW 1/4 of Section 14.

West Boundary - Located on the West line of the NW 1/4 of Section 14.

North Boundary - Located perpendicular to the West line of the NW 1/4 of Section 14 and 198.00 feet Northerly of the NW Corner of the SW 1/4 of the NW 1/4 when measured along the West line of the NW 1/4 of Section 14.

East Boundary - Located on the North-South centerline of the SW 1/4 of the NW 1/4 of Section 14.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

William R. Wells
William R. Wells, P.L.S.

4-1-79

Q-924-B