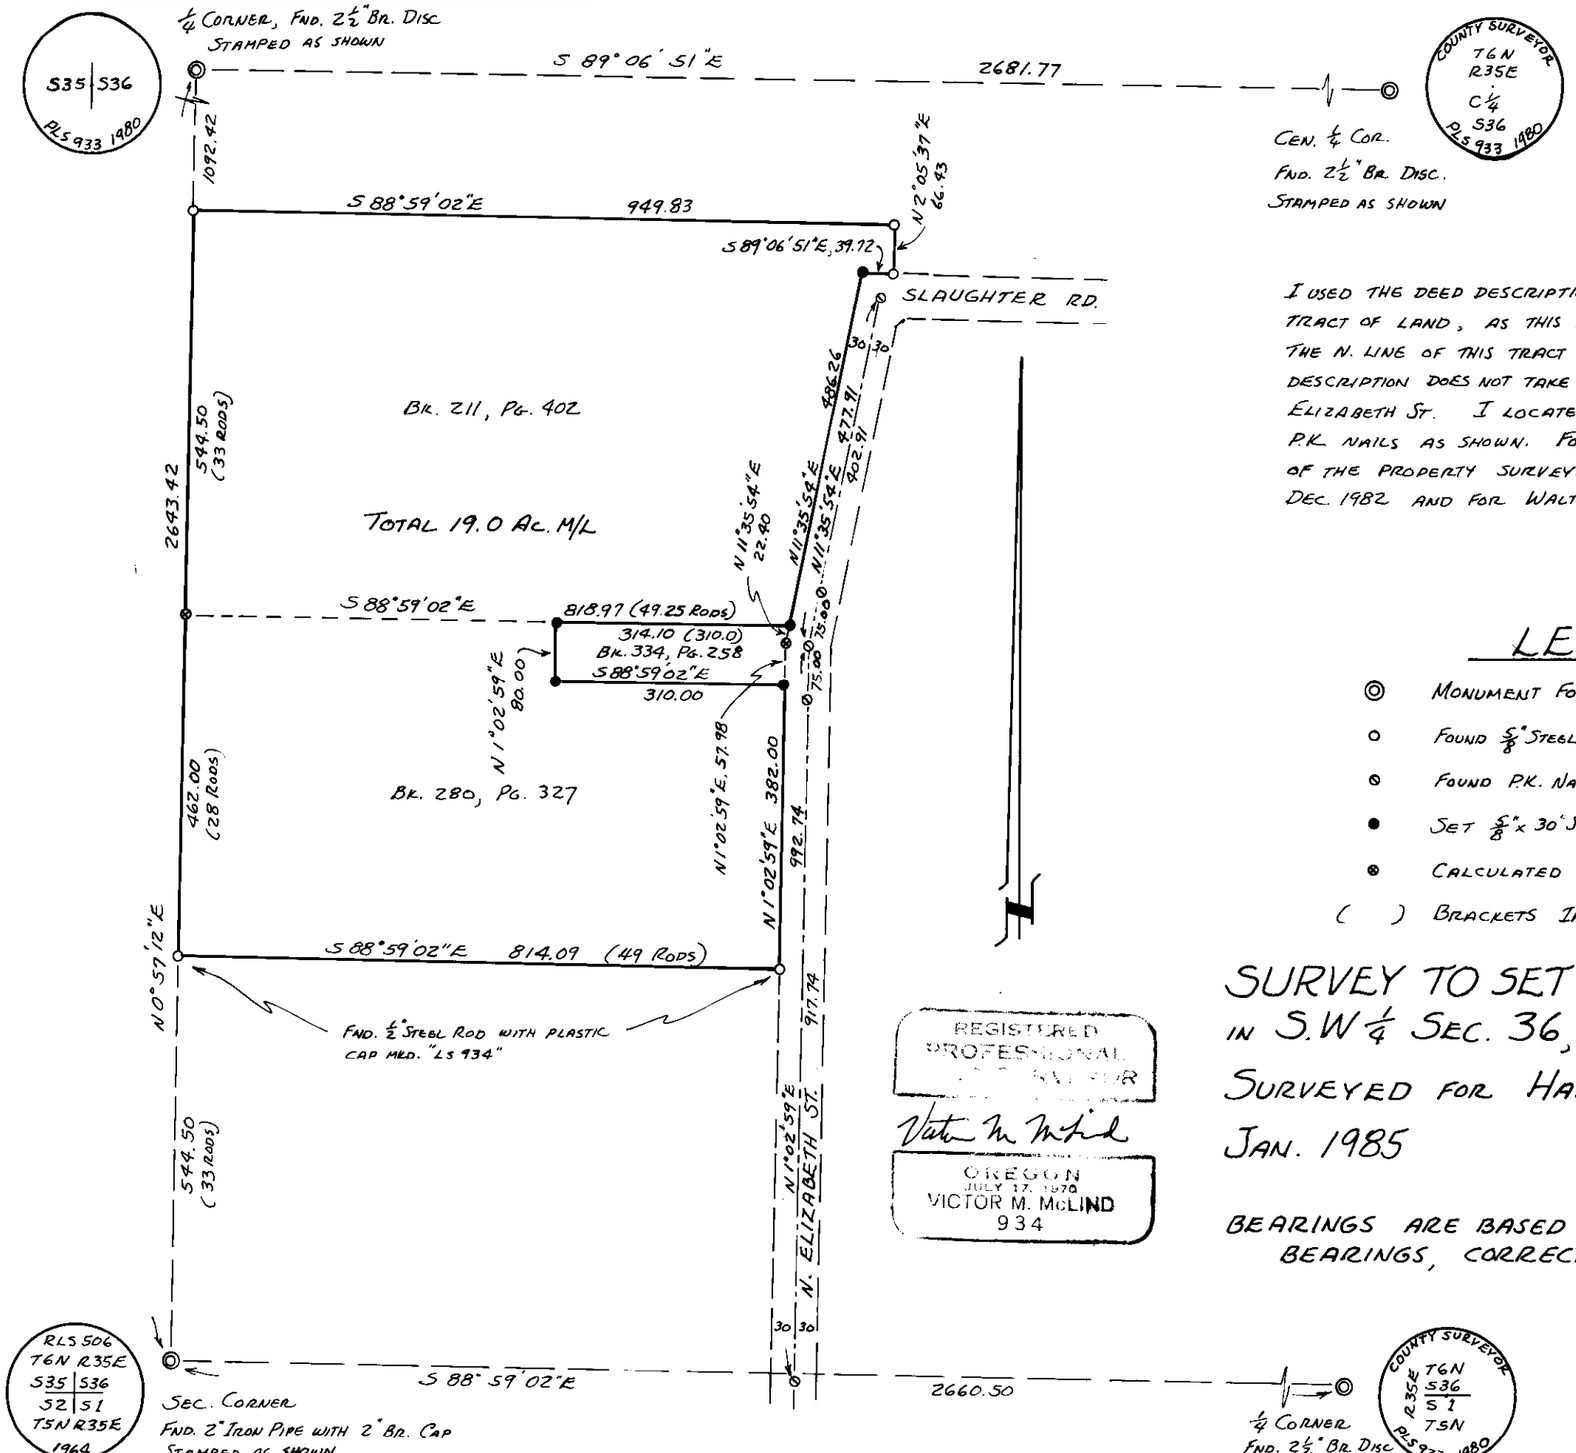

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON
JULY 17, 1970
VICTOR M. McLIND
934

I USED THE DEED DESCRIPTION TO LOCATE THE CORNERS OF THE 80' x 310' TRACT OF LAND, AS THIS IS THE BEST EVIDENCE AVAILABLE (BK. 334, PG. 258) THE N. LINE OF THIS TRACT IS LONGER THAN RECORD BECAUSE THE DEED DESCRIPTION DOES NOT TAKE INTO ACCOUNT THE BEND IN THE W. LINE OF N. ELIZABETH ST. I LOCATED THE CENTERLINE OF N. ELIZABETH ST. BY FOUND P.K. NAILS AS SHOWN. FOR THE CORNERS FOUND AROUND THE EXTERIOR OF THE PROPERTY SURVEYED, SEE MY SURVEYS FOR HARRY SMITH, DATED DEC. 1982 AND FOR WALTER ROLOFF, DATED JAN., 1985.

LEGEND

- ◎ MONUMENT FOUND AS NOTED
- ○ FOUND ⅝" STEEL ROD WITH BRASS TAG MKD. "LS 934", OR AS NOTED.
- ⊗ FOUND P.K. NAIL IN CENTERLINE OF ROAD
- ● SET ⅝" x 30" STEEL ROD WITH BRASS TAG MKD. "LS 934"
- ⊗ CALCULATED POINT, NOT FOUND OR SET.
- ( ) BRACKETS INDICATE RECORD DISTANCE

SURVEY TO SET PROPERTY CORNERS IN S.W ¼ SEC. 36, T6N, R35E, W.M.

SURVEYED FOR HARRY SMITH BY VICTOR M. McLIND

JAN. 1985 SCALE: 1" = 200'

BEARINGS ARE BASED ON ORE. STATE HWY. DEPT. GRID BEARINGS, CORRECTED TO TRUE.

RECEIVED BY
Umatilla County Surveyor
Date 2/85
Rec'd By bc
No. 85-21-A

85-21-A