


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by C.E. Redfield in Bureau of Indian Affairs Indian Allotment Survey, dated 1919.

T 1 N R 35 E F-11



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2" iron pipe with 2 1/2" brass cap, marked as shown below, protruding 15" above ground.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument,

NEW BEARING TREES:


A 17" Ponderosa Pine bears North 75° East, a distance of 43.90 feet, marked CN 1/16 S9 BT.
An 11" Ponderosa Pine bears South 46° West, a distance of 31.60 feet, marked CN 1/16 S9 BT.

A carsonite post bears South approx. 2 ft.

I hereby certify that the corner was perpetuated April 19, 2017.



Renewal Date: June 30, 2019

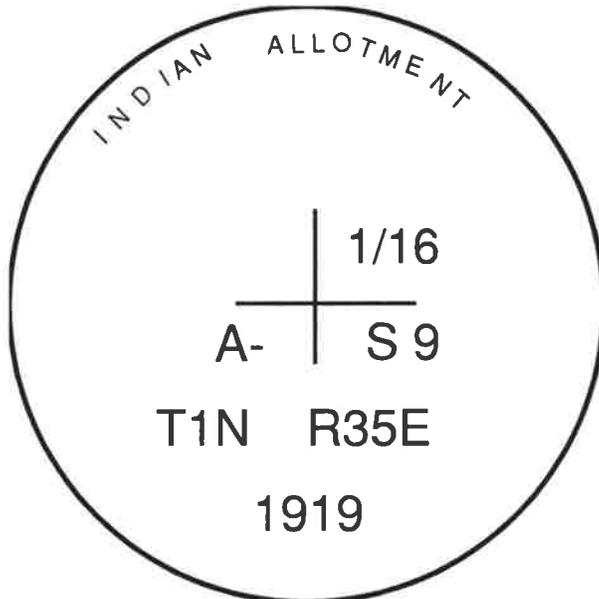

I used a steel tape and magnetic compass in the establishment of the bearing trees. Magnetic declination used was 13° East. Bearings are to a brass washer marked OPLS 83571 in the lower blaze of the tree. Distance is to a spike set in the root crown of the side of the tree.