


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:


Corner originally established by C.E. Redfield in Bureau of Indian Affairs Indian Allotment Survey, dated 1919.

T 1 N R 35 E H-11

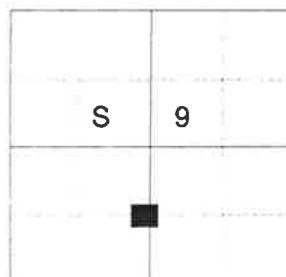

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2" iron pipe with 2 1/2" brass cap, marked as shown, removed from ground and tied to adjacent fencepost. The original position could not be ascertained.

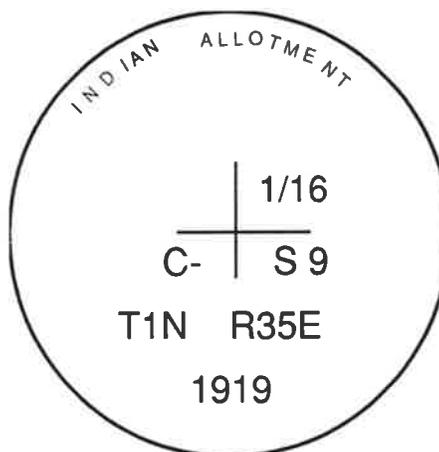

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At a proportionate position, I set a 2 1/2" x 30" aluminum pipe, 25" in the ground, with 2 1/2" aluminum cap, marked as shown below, in a collar of stone 4 ft. diam., from which

NEW BEARING OBJECT:

A 5/8" X 30" rebar bears North 87°55' West, a distance of 20.89 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER W RP.


A 5/8" x 30" rebar bears South 3°01' West, a distance of 20.01 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER S RP.

Set a steel fencepost approx. 2 ft. South.

I hereby certify that the corner was monumented June 6, 2017.



Renewal Date: June 30, 2017

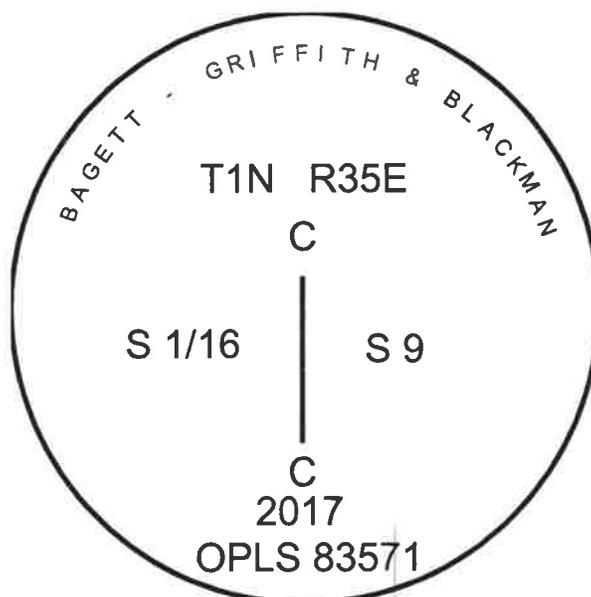

I used a Leica GS-15 RTK GPS in the establishment of the accessories. Basis of bearing is as per survey for Hancock Forest Management dated May/June 2017.