

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER**

**ESTABLISHED:**

Corner originally established by GLO contract dated May 4<sup>th</sup> 1887 executed by J.P. Currin and J.E. Noland. Surveyor General field notes state:

Set basalt stone 12x10x8 ins. 8 ins. in the ground marked 1/4 on the N face and rased a mound of stone over it.


Corner perpetuated by L.E. Wilkes under GLO special instructions dated Feb. 20, 1917, included in Group No. 29. Field Notes state:

Intersect the 1/4 sec. cor., which is a basalt stone, 16x12x6 ins., set in a mound of stone, marked 1/4 DR on N. face. Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, surrounded by a substantial mound of stone, for witness cor to the 1/4 sec. cor. with brass cap, from which:

A pine 12 ins. diam., bears S87°45'E., 56.5 lks. dist., marked "1/4 S17 DRBT".  
A pine, 8ins. diam., bears N17°45'E., 38.5 lks. dist., marked "1/4 S8 DRBT".

Corner found and accepted by William Wells in Survey Number 10-131-B

T 1 N R 35 E J-07

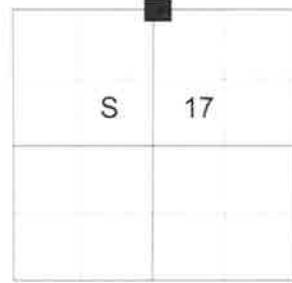

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 2" galv. iron pipe 24" above ground with 2½" brass cap marked as shown.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

From the iron pipe monument:


**NEW BEARING TREES:**

- A 18" ponderosa pine bears North 17° East a dist. of 24.40 ft., marked "1/4 S8 BT".
- A 13" ponderosa pine bears South 31° East a dist. of 51.50 ft., marked "1/4 S17 BT".
- A 24" ponderosa pine bears South 53° West a dist. of 6.40 ft., marked "1/4 S17 BT".
- A 10" ponderosa pine bears North 81° West a dist. of 60.20 ft., marked "1/4 S8 BT".

Corner set approximately 1.5 feet South of a East, West running fence line with an adjacent fence line running North.

I hereby certify that the corner was perpetuated on July 16, 2018.

Witness: Kyle A. Tucker, Ryan Skeen

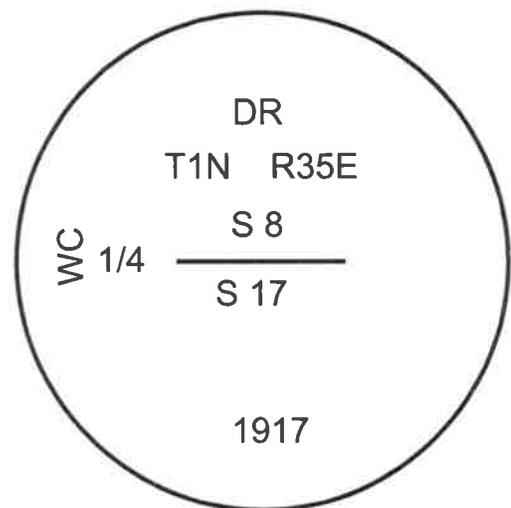

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2019

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

J-07

18-074-B