

Index

File No. MP 66

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. \_\_\_\_\_ Cor. No. MP


T 2S R. 34E

R.D. La Grande County Union

Merid. Willamette

N.F. Wallowa-Whitman State Oregon

CORNER DIAGRAM

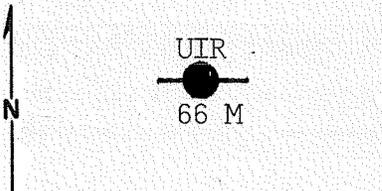

DESCRIBE CORNER MONUMENT FOUND

Found loosely set 2" iron pipe and brass cap in mound of stone.

Stamped: T2S R34E  
UIR  
66M  
1917

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Bearing trees are down and rotten.

6

PHOTO IDENTIFICATION DATA

Photo No. \_\_\_\_\_  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
*Signature*

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

3

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_

8

*Barry Barber* Signature

Title P. L. S.

Division \_\_\_\_\_

Headquarters Sumpter

Date 11-2-80

7100-52-(3/68)

4

5

**CORNER RECORD (PERPETUATION)**

**MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT**

Reset pipe in the ground 15" and built mound of stone around to cap. Stamped cap to read:

T2S R34E  
 UIR  
 \_\_\_\_\_  
 66M  
 RESET 1051  
 1980  
 1917

9

**ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE**

From which by magnetic declination of N20°E:  
 An 18" fir bears N29°W, 63.2 ft. scribed UIR MP66 BT. A 16" fir bears S25°E, 66.4 ft. scribed UIR MP66 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s, and brass washers stamped PLS 1051 on the BTs. Placed new 54-2 and 54-4 on existing fence post 5' east of the corner.

10

Work Done By B. B. Barbour Title P. L. S. Date 11-6-80 State Registration No. OR 1051  
 or Agency

Certified Cor. Record Prepared ? Yes  No  Filed At: Union County Surveyor's Date \_\_\_\_\_

11

**REMARKS**

witnesses: Daniel Rowland  
 Doug Moser  
 Ron Gilroy

Index File No.      T.      R.      M.      Tract or Surv. No.      Cor.

12

13