

GPS CONTROL STATION

OREGON STATE PLANE, NORTH ZONE

STATION NAME: 3N29E11 GEODETIC COORDINATE: NAD 83(91)

SECTION: S 1/4 S4 LAT: 45°45'44.91921" N
T. 3N., R. 29 E., W. M. LONG: 119°11'39.13688" W
UMATILLA COUNTY
OREGON

STATE PLANE CO-ORDINATES,
NAD 83-91, INT. FT. :

DATE SURVEYED: March, 1988

N: 766784.545

SURVEYOR: DAVID L. HADDOCK
PLS 852

E: 8535346.059

THETA: 0°55'33.79"

SCALE FACTOR: 0.99994829

ELEV: 731


FIRM: HADDOCK SURVEYING
P. O. BOX 1574
PENDLETON, OR 97801
(541) 276-2174

ELEV. DATUM: NGVD29


HORIZONTAL SECOND ORDER,
ORDER: CLASS I

LOCATION: From the intersection of US Interstate 84 and US 395 go north on US 395 approximately 3 tenths of a mile to the intersection of County Road 1178 (Irvin Road). Go east on Irvin Rd. 1/2 mile to North Ash Road. Go South on North Ash Road 1/2 mile. The cap is below the surface of the gravel road at the intersection of a curve to the left in the current gravel road with the visible road cut with the vacated original road to the south. The cap lies on the west side of the existing gravel approximately 100 feet north of a steel power transmission tower and about 20 feet east of the fence.

STATION: Station is a 2 1/4 inch brass disc on a galvanized iron pipe approximately 6 inches below the surface.

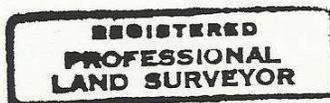

David L. Haddock

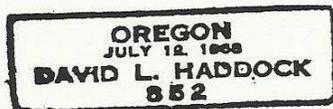

OREGON CORNER RESTORATION FORM

Section 4 Township 3N Range 29E
 County Umatilla Date: April 4, 1998

Corner Designation: 3N29E11

Condition Report Only
 Not found



1/4 corner common to section 4 and 9,
 T3N, R29E, W.M.

Remonumented
 Unrecorded
 Surveyed in
 Referenced out

Previous Renewals / Surveys, etc.

Corner originally established by Gates in 1859 under contract No. 84 was a post and a mound of earth with charcoal.

Monument and Accessories found: (condition and source)
 None.

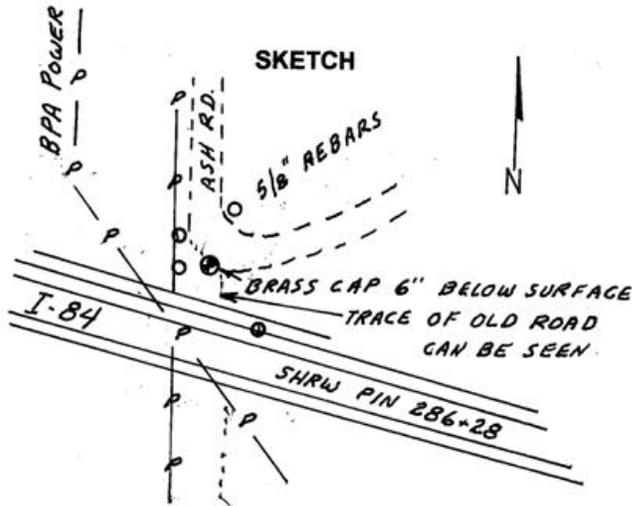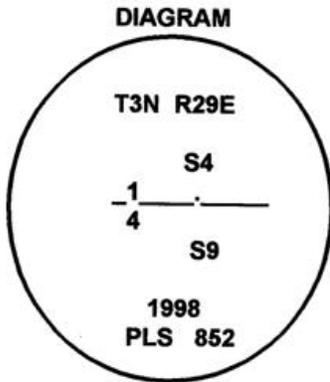

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

At the intersection of the proportioned east - west section line and the centerline of the existing north south county road we set a 2 1/4 inch brass cap on a 1 1/8" x 24" galvanized iron pipe six inches below the surface.

REFERENCES SET:

- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears N53°10'56"W 24.18 feet.
- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears S72°45'37"W 20.20 feet.
- A 5/8" x 24" rebar with a 1 1/8" red plastic cap stamped ORLS 852 and WALS 13922 bears N62°25'07"E 20.35 feet twelve inches below the surface.
- The iron pin for the SHRW for I 84 station 286+28, 165.00 left, bears S21°14'05"E 251.02 feet.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:
Umatilla County Surveyor
 Date: 8-98
 Rec'd By: KK
 No. 98-155-C

Firm / Agency
 Haddock Surveying
 Address
 P.O. Box 1574
 Pendleton, Or. 97801
 Party Chief
 Stephen K, Haddock

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

David L. Haddock

OREGON
 JULY 12, 1908
 DAVID L. HADDOCK
 852

RECEIVED BY
 Umatilla County Surveyor
 Date _____
 Rec'd by _____
 No. _____