


History of original corner establishment:

Original corner set by George S. Pershin on November 6, 1878, under contract No. 304, as follows:

Set pine post on west hillside for 1/4 section corner, from which:

A 45" Pine bears N36°W, 110 links (72.6 feet). No other trees.

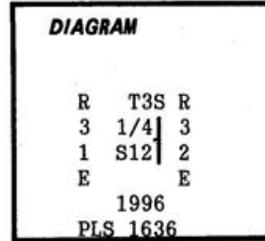

Description of corner evidence found:

The corner post is gone. The original 45" pine is now a 40" broken Ponderosa Pine stump, 5 feet high. No marks remain on the charred blazes. Bears N36°W, 72.6 feet.


Description of monument and accessories established to perpetuate the original location of this corner:

At the corner point as determined by reference to the original bearing tree remains, I set a 1 1/2" x 30" galvanized iron pipe 27" into the ground. A 2 1/2" brass cap attached is marked as shown in the diagram above, from which:

- A 20" Ponderosa Pine, scribed "1/4S BT", bears N7°E, 27.6 feet.
- A 23" Ponderosa Pine, scribed "1/4S BT", bears S80°E, 41.7 feet.
- A 14" Ponderosa Pine, scribed "1/4S12 BT", bears S61°W, 58.3 feet.
- A 23" Ponderosa Pine, scribed "1/4S12 BT", bears N45°W, 22.1 feet.

The new bearing trees are scribed on double blazes, have a 5/8" brass washer, marked "PLS 1636", nailed flush to the lower blaze and have a bearing tree sign nailed above the blazes. The new bearing tree to the northwest also has a witness post sign nailed to the back side of the tree.

I hereby certify the above corner point was perpetuated as hereon described on May 12, 1996. Magnetic declination: 20°E.

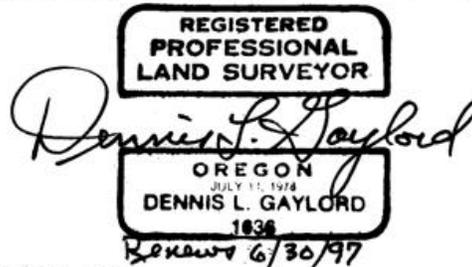

Office of COUNTY SURVEYOR County of UMATILLA

State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 22 day of MAY, 1996

David H. Kline by _____ (DEPUTY)

(COUNTY OFFICIAL)

RECEIVED BY

Umatilla County Surveyor

Date 5-96

Rec'd By KK

No. 96-74-R