

OREGON CORNER RESTORATION FORM

Section 28 & 29 Township 6N Range 35E , W.M. Corner Code No. T-05
 County Umatilla Date January 11, 1996

CORNER DESIGNATION

- Condition Report Only
- Not Found
- Renewed
- Unrecorded
- Surveyed In
- Referenced Out

Previous Renewals/Surveys, etc.


Corner was originally set by W. Odell in 1865 as a post, charred stake, mound, and pits (according to the GLO notes, which make no mention of a creek branch, although it is shown on the Township Plat Map).

Monument(s) & Accessories Found: (Condition and Source)

No monument or accessories found.

Monument Detail

Sketch

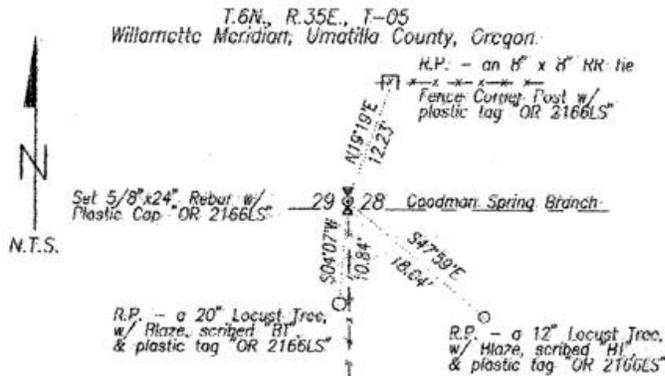

Monument Set (Procedures and Description)

I set a 5/8" x 24" rebar with plastic cap "OR 02166LS" for the corner.

New Accessories

A 20" Locust tree which I blaze, scribe "BT", and attach a plastic tag "OR 02166LS", bears S04°07'W a distance of 10.84 feet.

A 12" Locust tree which I blaze, scribe "BT", and attach a plastic tag "OR 02166LS", bears S47°59'E a distance of 18.04 feet.

An 8" x 8" RR Tie Fence Post to which I attach a plastic tag "OR 02166LS", bears S19°19'W a distance of 12.23 feet.

Location & Comments

Corner is located 1/4 mile North of the corner of County Road No 309 along a fence line, and lies in the bed of Goodman Spring Branch.

RECEIVED BY
 Umatilla County Surveyor
 Date 1-96
 Rec'd by KE
 No. 96-002-B

Compass Declination - Assumed

Firm/Agency
Dwight M. Bartleson L.S.
Address 79902 LaMar Gulch
Road, Athena, OR 97813

Party Chief DMB
Notes DMB
Witness none

Surveyor's Seal

REGISTERED PROFESSIONAL LAND SURVEYOR

Dwight M. Bartleson

OREGON
 JULY 28, 1985
 DWIGHT M. BARTLESON
 02166LS

RENEWS Dec 31, 1997