


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner not previously established.

T 1 N R 35 E M-08



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8"x30" iron pin with a 2 1/2 ins. aluminum cap marked as shown below, 26" in the ground, from which:

**NEW BEARING TREES:**

A 18" Ponderosa Pine bears South 32° East a dist. of 17.90 ft., marked "SE 1/16 S17 BT"


A 10" Western Larch bears North 4° West a dist. of 15.70 ft., marked "SE 1/16 S17 BT"

I hereby certify that the corner was perpetuated on July 18, 2018.

Witness: Kyle A. Tucker, Ryan Skeen



Renewal Date: June 30, 2019

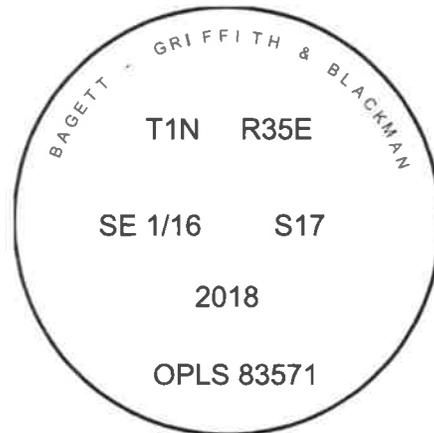

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

M-08

18-074-6